

Cafe Light Meals

60 sqm | 35 seats | beverage-led service

L-shaped service bar with coffee, ice and cold prep within reach

Customers move along display and payment. Staff work inside the bar triangle while receiving and washing remain behind the service line.



3D planning visualization generated from the reference brief | Not a site photograph

FOOTPRINT

8,000 x 7,500 mm

WORKING CLEARANCE

1,100 mm bar aisle


TEAM BASIS

4 to 6 opening crew

Planning basis prepared for restaurant founders, growing brands and equipment distributors.
Final site dimensions, utilities, code compliance and installation drawings require local professional review.

Dimensioned layout and movement routes

8,000 x 7,500 mm

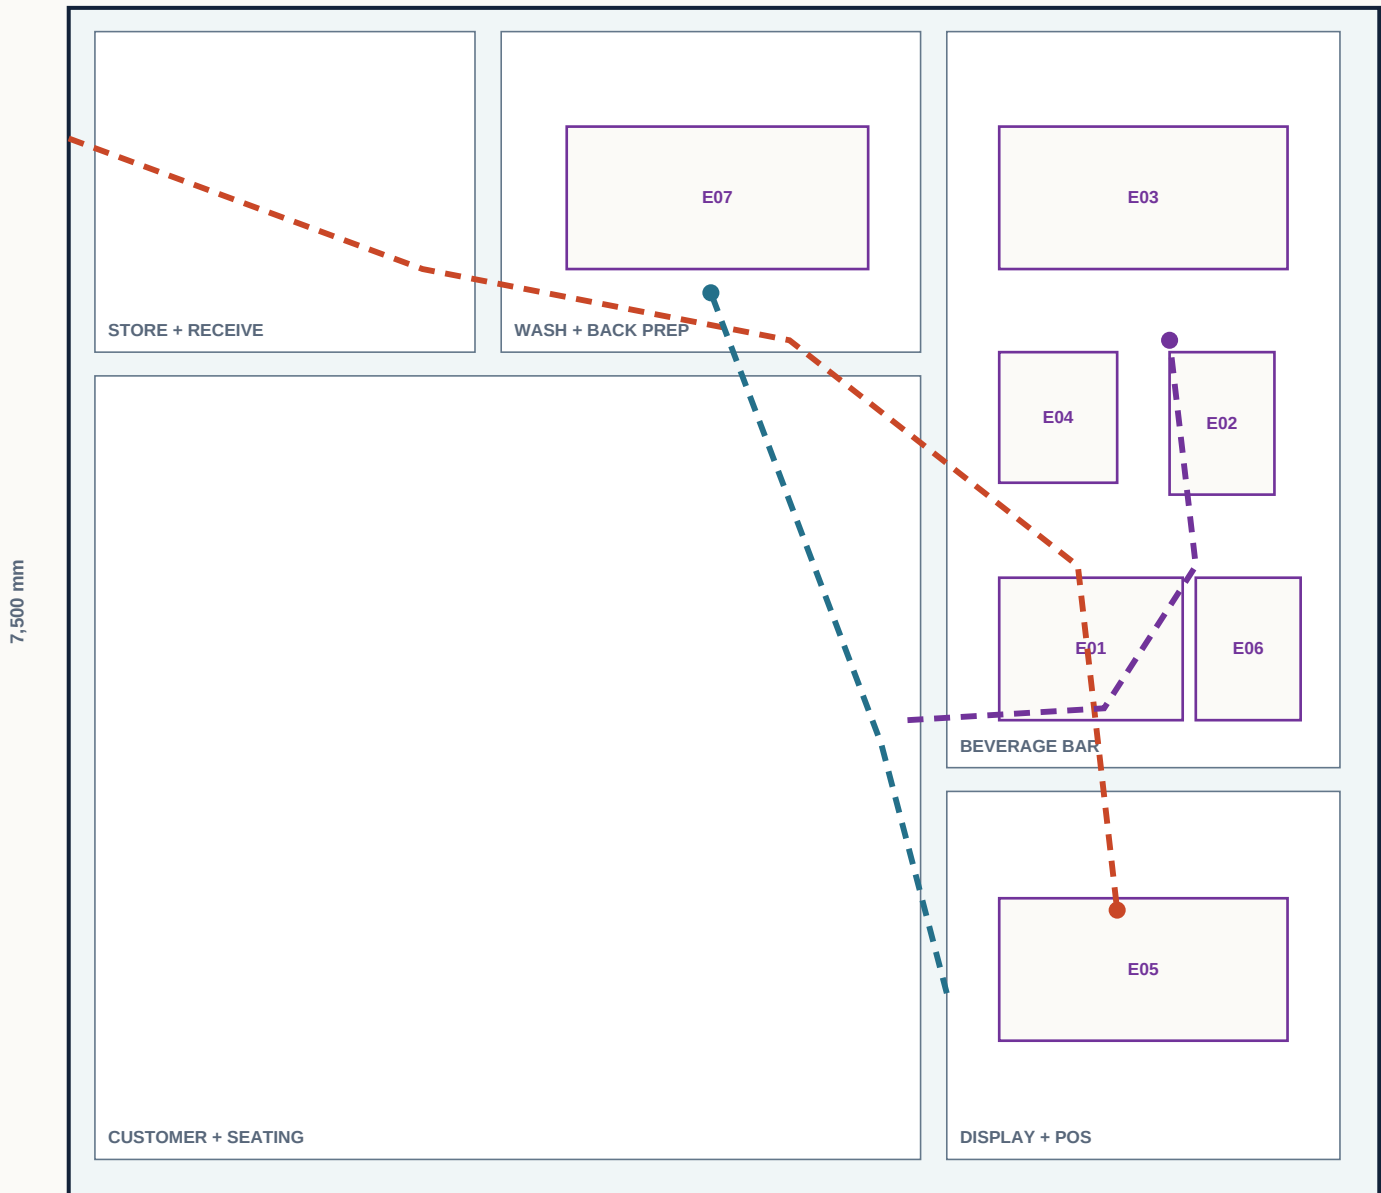

Food and product

Staff working route

Dirty ware

LAYOUT READING NOTES

- 1,100 mm bar aisle
- Equipment codes correspond to the schedule on page 4.
- Doors, clearances and service openings must be checked against the measured site.
- Routes show operating intent, not authority-approved food-safety documentation.

Utility, service and clearance basis

DESIGN BASIS, NOT FINAL LOADS

Connection types below support supplier comparison and MEP coordination. Exact voltage, phase, power, gas, water, drainage, duct size and fire provisions are confirmed against the approved model and local code.

CODE	EQUIPMENT	CONNECTION BASIS	SERVICE / CLEARANCE
E01	Two-group coffee machine	Water + trapped waste	Keep valves and waste serviceable
E02	Ice machine	Water + trapped waste	Keep valves and waste serviceable
E03	Under-counter chiller	220V dedicated outlet	Ventilation and condenser access
E04	Juice extractor	Water + trapped waste	Keep valves and waste serviceable
E05	Refrigerated display	220V dedicated outlet	Ventilation and condenser access
E06	Compact oven	Gas or 3P power basis	Rear isolation and service access
E07	Dishwasher + sink	Water + trapped waste	Keep valves and waste serviceable

NTS | Confirm the measured site, selected models, local authority requirements and licensed MEP design before construction.

Core equipment schedule

CODE	EQUIPMENT	NOMINAL SIZE (MM)	PLACEMENT BASIS
E01	Two-group coffee machine	860 x 620	Facing the pickup counter
E02	Ice machine	500 x 600	Rear beverage station
E03	Under-counter chiller	1500 x 700	Milk and service stock
E04	Juice extractor	300 x 450	Next to preparation sink
E05	Refrigerated display	1200 x 700	Customer queue side
E06	Compact oven	600 x 650	Light meal finishing
E07	Dishwasher + sink	1600 x 700	Rear wash zone

FINAL SCHEDULE INPUTS

Menu, peak throughput, available voltage, gas policy, ambient conditions, door sizes and destination certification requirements are confirmed before supplier release.

Functional zone and hygiene schedule

The sequence below connects each room or operating zone to the main coordination checkpoint. It is a design review list, not an authority-approved food-safety plan.

01	STORE + RECEIVE	Delivery route, door width, storage segregation and temperature holding
02	WASH + BACK PREP	Washable surfaces, task separation, hand wash and short ingredient route
03	BEVERAGE BAR	Confirm operating route, hygiene boundary and service access
04	CUSTOMER + SEATING	Confirm operating route, hygiene boundary and service access
05	DISPLAY + POS	Order handoff, holding time, customer separation and clean service edge

REVIEW GATE Freeze room sizes only after menu, peak load, equipment models, storage days and local code review are aligned.

Utilities and package levels

UTILITY CHECKPOINTS

- 220V and 380V schedule
- Filtered water for beverage line
- Ice machine drain
- Ventilation for light cooking

PACKAGE LEVELS

01

Lean launch

Cold beverages, display, preparation and washing.

02 | RECOMMENDED BASIS

Balanced

Adds light cooking and larger ice capacity.

03

High output

Dual cold stations for rush-hour service.

What changes the final price

- Selected equipment models and local certification
- Freight mode, container loading and destination charges
- Local installation, permits, site works and professional drawings

Evidence chain from review to destination



SUPPLIER REVIEW

Real DDNZ field material from a China-origin production site.



PRODUCTION + PACK-OUT

Real production and packing record for commercial ice equipment.



CONTAINER LOADING

Real anonymized export loading record.



UAE DESTINATION HANDLING

Real DDNZ kitchen equipment unloading record.



OPERATING CONTEXT

Reference only. Not represented as a DDNZ installation case.

Evidence rule

Concept visuals explain the intended design. Field records prove work actually performed. Operating references show context but are never presented as a completed DDNZ installation.

From concept plan to export release

01

Operating brief

Menu, capacity, service model, site and budget basis.

02

Measured layout

Actual dimensions, workflow, equipment positions and connections.

03

Equipment package

Comparable models, approved options, schedule and supplier quotations.

04

QC + export release

Identity checks, inspection evidence, packing records and freight handoff.

SEND DDNZ THESE INPUTS FOR A MATCHED REVIEW

☐

Measured floor plan or lease drawing

☐

Menu and peak-hour order target

☐

Destination, voltage and fuel policy

☐

Target opening date and equipment budget

manager@ddnzglobal.com

Concept document only | Local professional review required