

Casual Dining

120 sqm | 70 to 90 seats | full service

Zoned kitchen with separate raw prep, hot production and warewashing

A central production aisle connects cold preparation to the cook line. Dish return reaches washing without crossing the plating pass.



3D planning visualization generated from the reference brief | Not a site photograph

FOOTPRINT

12,000 x 10,000 mm

WORKING CLEARANCE

1,400 mm production aisle


TEAM BASIS

10 to 16 opening crew

Planning basis prepared for restaurant founders, growing brands and equipment distributors.
Final site dimensions, utilities, code compliance and installation drawings require local professional review.

Dimensioned layout and movement routes

12,000 x 10,000 mm

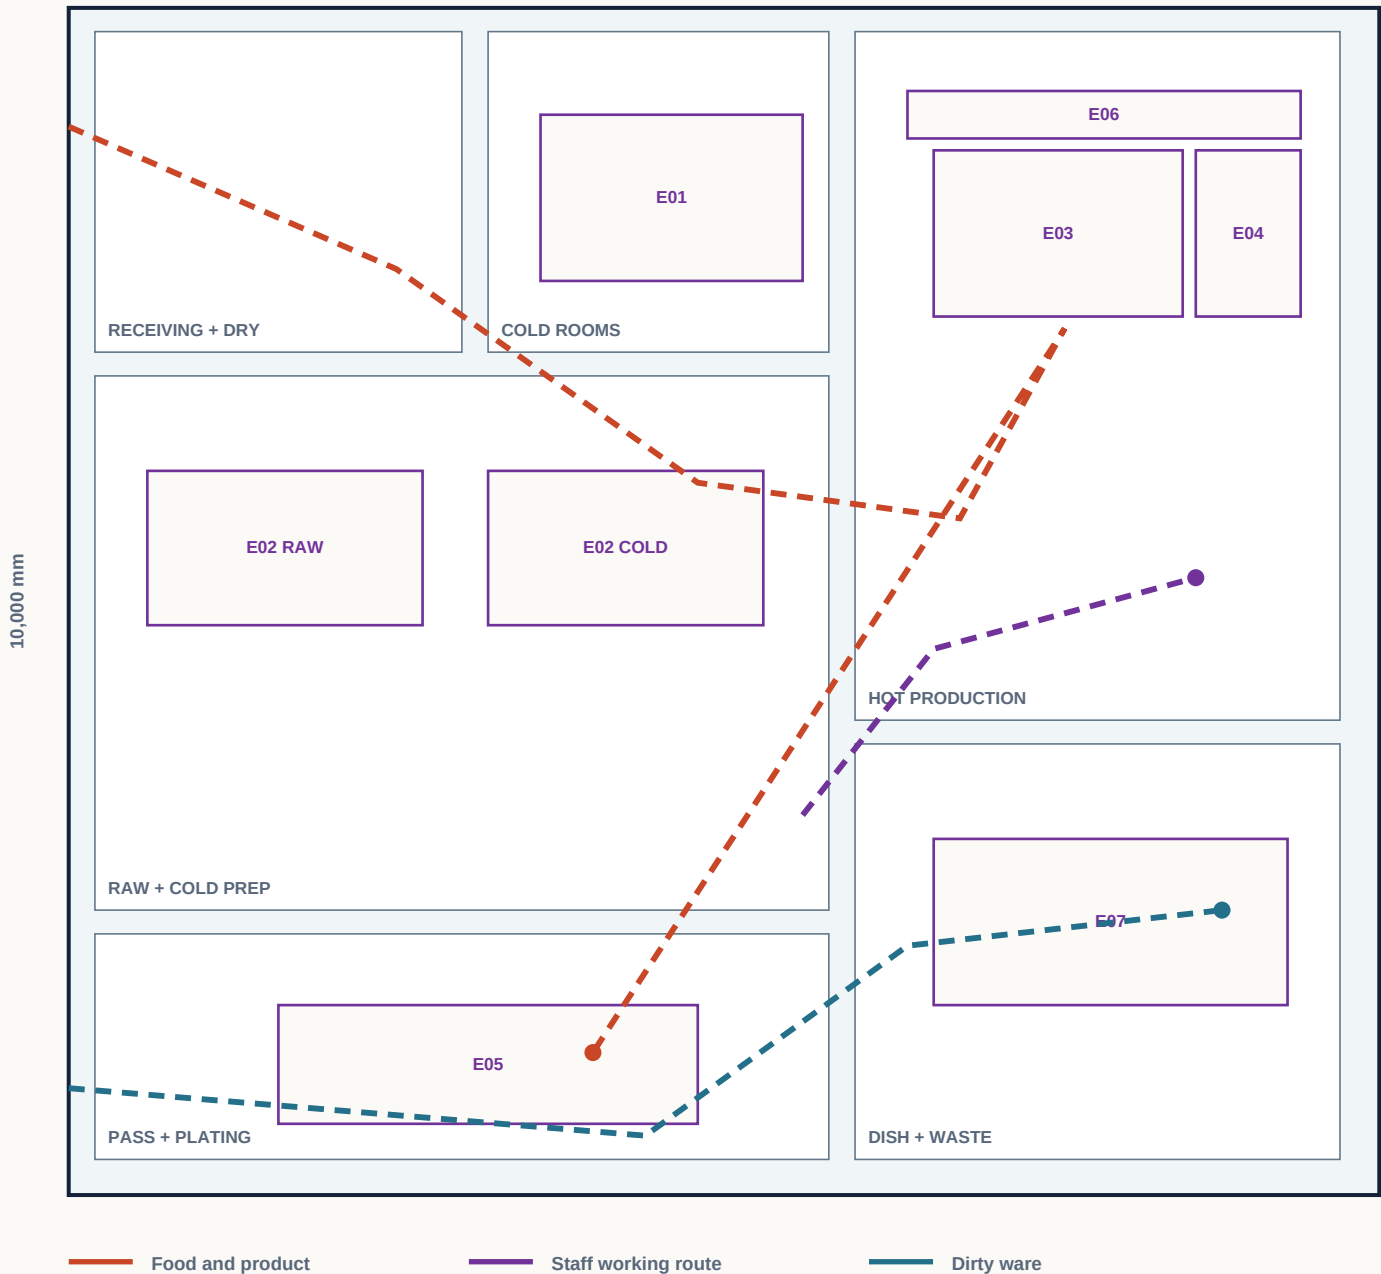

LAYOUT READING NOTES

- 1,400 mm production aisle
- Equipment codes correspond to the schedule on page 4.
- Doors, clearances and service openings must be checked against the measured site.
- Routes show operating intent, not authority-approved food-safety documentation.

Utility, service and clearance basis

DESIGN BASIS, NOT FINAL LOADS

Connection types below support supplier comparison and MEP coordination. Exact voltage, phase, power, gas, water, drainage, duct size and fire provisions are confirmed against the approved model and local code.

CODE	EQUIPMENT	CONNECTION BASIS	SERVICE / CLEARANCE
E01	Double-door chiller	220V dedicated outlet	Ventilation and condenser access
E02	Preparation counter	Confirm selected model	Maintain removable-panel access
E03	Griddle + range line	Gas or 3P power basis	Rear isolation and service access
E04	Convection oven	Gas or 3P power basis	Rear isolation and service access
E05	Pass + hot holding	Confirm selected model	Maintain removable-panel access
E06	Hood system	Fan and lighting load	Access filters, fan and controls
E07	Dishwasher + three sinks	Water + trapped waste	Keep valves and waste serviceable

NTS | Confirm the measured site, selected models, local authority requirements and licensed MEP design before construction.

Core equipment schedule

CODE	EQUIPMENT	NOMINAL SIZE (MM)	PLACEMENT BASIS
E01	Double-door chiller	1430 x 870	Cold store interface
E02	Preparation counter	1800 x 800	Separate raw and cold prep
E03	Griddle + range line	2200 x 900	Central hot production
E04	Convection oven	900 x 850	End of cook line
E05	Pass + hot holding	2400 x 800	Dining room service edge
E06	Hood system	3600 x 1300	Local air balance review
E07	Dishwasher + three sinks	2600 x 800	Separate dirty return

FINAL SCHEDULE INPUTS

Menu, peak throughput, available voltage, gas policy, ambient conditions, door sizes and destination certification requirements are confirmed before supplier release.

Functional zone and hygiene schedule

The sequence below connects each room or operating zone to the main coordination checkpoint. It is a design review list, not an authority-approved food-safety plan.

01	RECEIVING + DRY	Confirm operating route, hygiene boundary and service access
02	COLD ROOMS	Delivery route, door width, storage segregation and temperature holding
03	RAW + COLD PREP	Delivery route, door width, storage segregation and temperature holding
04	HOT PRODUCTION	Hood capture, heat clearance, fire provisions and emergency isolation
05	DISH + WASTE	Dirty return, hot water, trapped waste, floor drain and chemical storage
06	PASS + PLATING	Order handoff, holding time, customer separation and clean service edge

REVIEW GATE Freeze room sizes only after menu, peak load, equipment models, storage days and local code review are aligned.

Utilities and package levels

UTILITY CHECKPOINTS

- Gas or electric cooking basis
- Grease and drainage coordination
- Extraction and replacement air
- Three-phase load schedule

PACKAGE LEVELS

01

Lean launch

Core line for a focused opening menu.

02 | RECOMMENDED BASIS

Balanced

Adds menu breadth and service resilience.

03

High output

Parallel preparation and cooking for multiple dayparts.

What changes the final price

- Selected equipment models and local certification
- Freight mode, container loading and destination charges
- Local installation, permits, site works and professional drawings

Evidence chain from review to destination



SUPPLIER REVIEW

Real DDNZ field material from a China-origin production site.



PRODUCTION + PACK-OUT

Real production and packing record for commercial ice equipment.



CONTAINER LOADING

Real anonymized export loading record.



UAE DESTINATION HANDLING

Real DDNZ kitchen equipment unloading record.



OPERATING CONTEXT

Reference only. Not represented as a DDNZ installation case.

Evidence rule

Concept visuals explain the intended design. Field records prove work actually performed. Operating references show context but are never presented as a completed DDNZ installation.

From concept plan to export release

01

Operating brief

Menu, capacity, service model, site and budget basis.

02

Measured layout

Actual dimensions, workflow, equipment positions and connections.

03

Equipment package

Comparable models, approved options, schedule and supplier quotations.

04

QC + export release

Identity checks, inspection evidence, packing records and freight handoff.

SEND DDNZ THESE INPUTS FOR A MATCHED REVIEW

☐

Measured floor plan or lease drawing

☐

Menu and peak-hour order target

☐

Destination, voltage and fuel policy

☐

Target opening date and equipment budget

manager@ddnzglobal.com

Concept document only | Local professional review required