

Takeaway QSR

48 sqm | 80 to 140 peak orders per hour

Straight production flow for fried, grilled and delivery-led menus

Receiving and cold holding feed preparation, preparation feeds one hot line, and the pass faces pickup. Dirty ware returns on the opposite side.



3D planning visualization generated from the reference brief | Not a site photograph

FOOTPRINT

8,000 x 6,000 mm

WORKING CLEARANCE

1,200 mm clear working aisle


TEAM BASIS

5 to 8 opening crew

Planning basis prepared for restaurant founders, growing brands and equipment distributors.
Final site dimensions, utilities, code compliance and installation drawings require local professional review.

Dimensioned layout and movement routes

8,000 x 6,000 mm

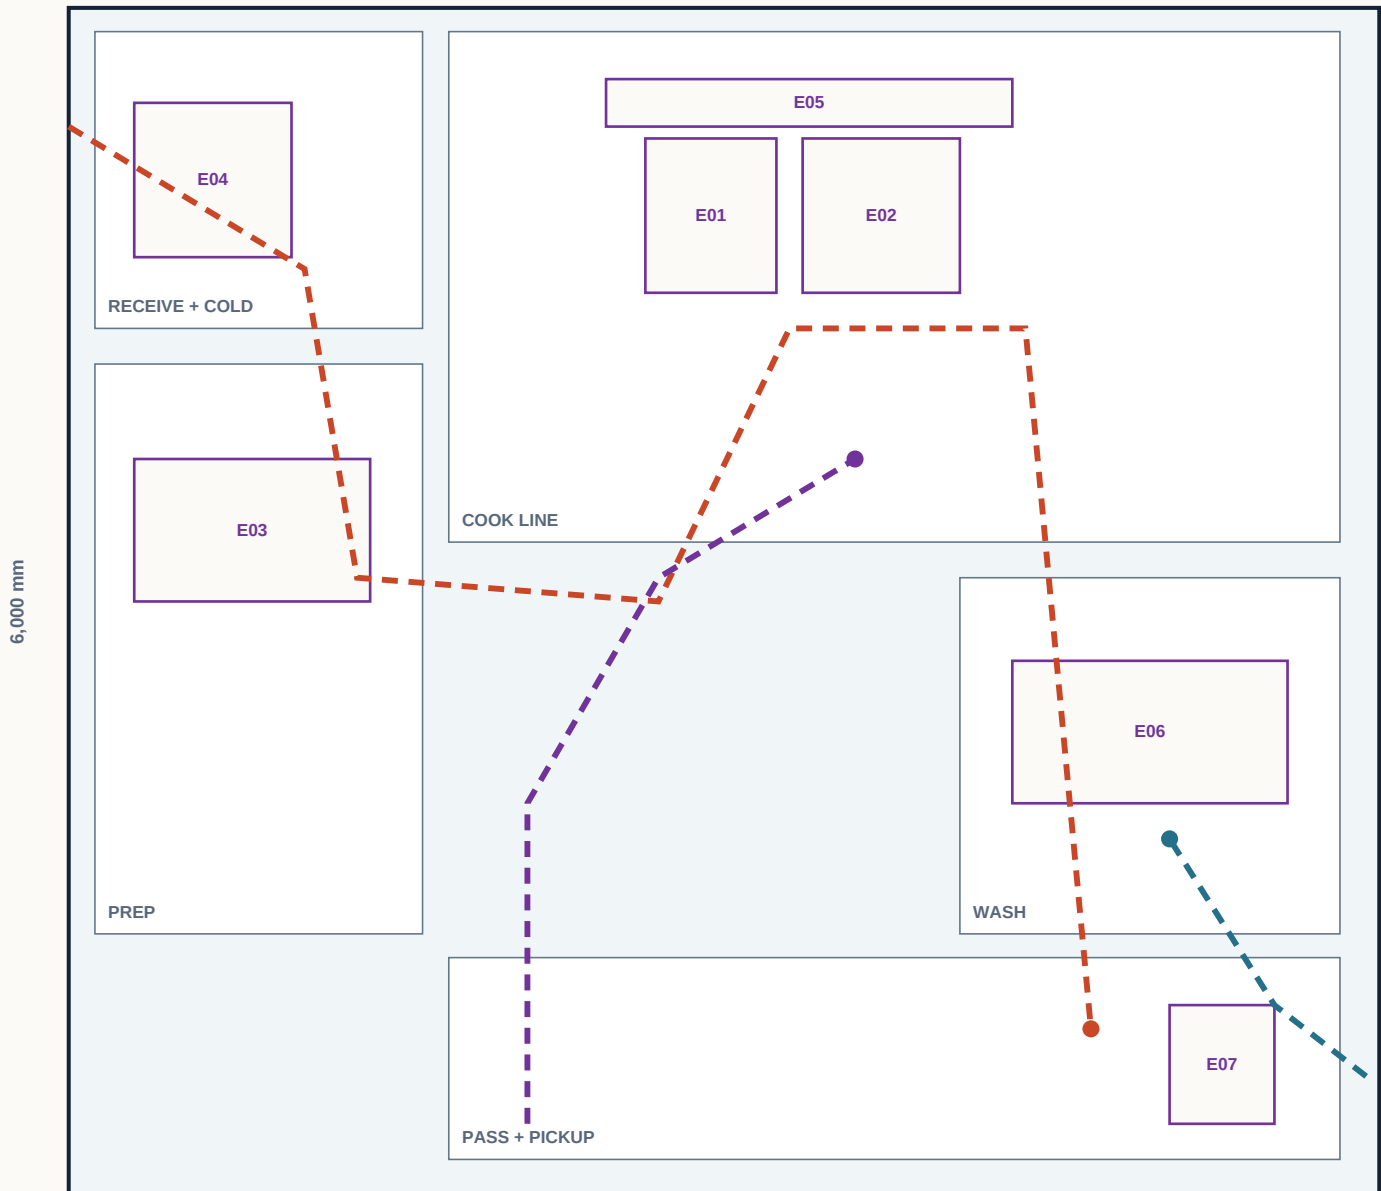

Food and product

Staff working route

Dirty ware

LAYOUT READING NOTES

- 1,200 mm clear working aisle
- Equipment codes correspond to the schedule on page 4.
- Doors, clearances and service openings must be checked against the measured site.
- Routes show operating intent, not authority-approved food-safety documentation.

Utility, service and clearance basis

DESIGN BASIS, NOT FINAL LOADS

Connection types below support supplier comparison and MEP coordination. Exact voltage, phase, power, gas, water, drainage, duct size and fire provisions are confirmed against the approved model and local code.

CODE	EQUIPMENT	CONNECTION BASIS	SERVICE / CLEARANCE
E01	Double fryer	Gas or 3P power basis	Rear isolation and service access
E02	Electric griddle	Gas or 3P power basis	Rear isolation and service access
E03	Refrigerated prep counter	220V dedicated outlet	Ventilation and condenser access
E04	Upright chiller	220V dedicated outlet	Ventilation and condenser access
E05	Extraction hood	Fan and lighting load	Access filters, fan and controls
E06	Two-bowl sink + bench	Water + trapped waste	Keep valves and waste serviceable
E07	Ice machine	Water + trapped waste	Keep valves and waste serviceable

NTS | Confirm the measured site, selected models, local authority requirements and licensed MEP design before construction.

Core equipment schedule

CODE	EQUIPMENT	NOMINAL SIZE (MM)	PLACEMENT BASIS
E01	Double fryer	800 x 700	Two independent tanks
E02	Electric griddle	900 x 700	Flat top with splash guards
E03	Refrigerated prep counter	1500 x 700	Ingredient rail and GN pans
E04	Upright chiller	740 x 870	Rear receiving side
E05	Extraction hood	2400 x 1100	Above fryer and griddle
E06	Two-bowl sink + bench	1800 x 700	Dirty return side
E07	Ice machine	500 x 600	Pickup beverage point

FINAL SCHEDULE INPUTS

Menu, peak throughput, available voltage, gas policy, ambient conditions, door sizes and destination certification requirements are confirmed before supplier release.

Functional zone and hygiene schedule

The sequence below connects each room or operating zone to the main coordination checkpoint. It is a design review list, not an authority-approved food-safety plan.

01	RECEIVE + COLD	Delivery route, door width, storage segregation and temperature holding
02	PREP	Washable surfaces, task separation, hand wash and short ingredient route
03	COOK LINE	Hood capture, heat clearance, fire provisions and emergency isolation
04	WASH	Dirty return, hot water, trapped waste, floor drain and chemical storage
05	PASS + PICKUP	Order handoff, holding time, customer separation and clean service edge

REVIEW GATE Freeze room sizes only after menu, peak load, equipment models, storage days and local code review are aligned.

Utilities and package levels

UTILITY CHECKPOINTS

- 380V / 3P cooking option
- Drain at wash and prep
- Fresh air and extraction review
- Hot water at warewash

PACKAGE LEVELS

01

Lean launch

Core cooking, cold holding, preparation and washing.

02 | RECOMMENDED BASIS

Balanced

Adds faster recovery and backup cold capacity.

03

High output

Parallel frying and preparation for delivery peaks.

What changes the final price

- Selected equipment models and local certification
- Freight mode, container loading and destination charges
- Local installation, permits, site works and professional drawings

Evidence chain from review to destination



SUPPLIER REVIEW

Real DDNZ field material from a China-origin production site.



PRODUCTION + PACK-OUT

Real production and packing record for commercial ice equipment.



CONTAINER LOADING

Real anonymized export loading record.



UAE DESTINATION HANDLING

Real DDNZ kitchen equipment unloading record.



OPERATING CONTEXT

Reference only. Not represented as a DDNZ installation case.

Evidence rule

Concept visuals explain the intended design. Field records prove work actually performed. Operating references show context but are never presented as a completed DDNZ installation.

From concept plan to export release

01

Operating brief

Menu, capacity, service model, site and budget basis.

02

Measured layout

Actual dimensions, workflow, equipment positions and connections.

03

Equipment package

Comparable models, approved options, schedule and supplier quotations.

04

QC + export release

Identity checks, inspection evidence, packing records and freight handoff.

SEND DDNZ THESE INPUTS FOR A MATCHED REVIEW

☐

Measured floor plan or lease drawing

☐

Menu and peak-hour order target

☐

Destination, voltage and fuel policy

☐

Target opening date and equipment budget

manager@ddnzglobal.com

Concept document only | Local professional review required